



PIN	SYMBOL
1	LEDK
2	GND
3	TE
4	SDA
5	WR
6	RS
7	CS
8	RST
9	IOVCC
10	VCC
11	VCC
12	GND
13	GMD
14	LEDA
15	LEDA

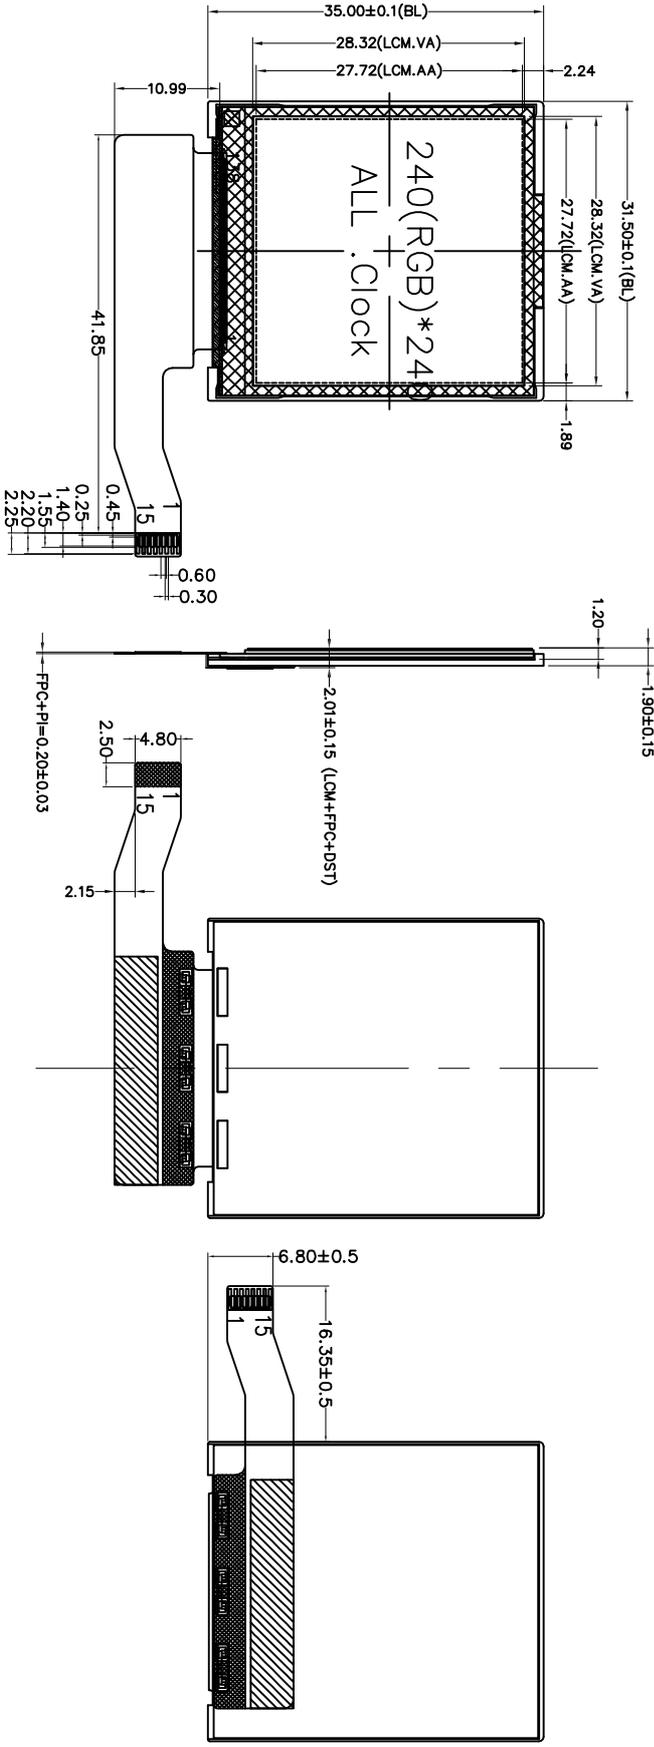

NOTES:

1. VIEWING DIRECTION FREE
2. POLARIZER MODE : TRANSMISSIVE
3. OPERATING TEMP : -10°C~+60°C
4. STORAGE TEMP : -20°C~+70°C
5. DRIVER IC : ST7789V2
6. CONNECTOR : COG+FPIC
7. GENERAL TOLERANCE ±0.2



REV	DESCRIPTION	DATE	SCALE:1/1	UNIT:mm	PAGE:1/1	APPROVED	CHECKER	DRAWN
A	THE FIRST ISSUE	2020.8.14	FS15411-15P					
B								
N								